

Shock absorption application

1K bonding of rubber pellets - Solvent free, moisture-curing

ProFect® 41180

- Used where UV resistance is not an issue
- Suitable for fx red/brown parts
- Also suitable for shock pads applied under various thickness of artificial grass

Physical properties:

Hardness [Shore A]	46
Tensile strength {Mpa}	0,85
Elongatin at break [%]	128




Shock pad

ProFect® 41181

- Used where UV resistance is important
- Suitable for numbers and stripes for athletics areas

Physical properties:

Hardness [Shore A]	43
Tensile strength {Mpa}	0,6
Elongatin at break [%]	40

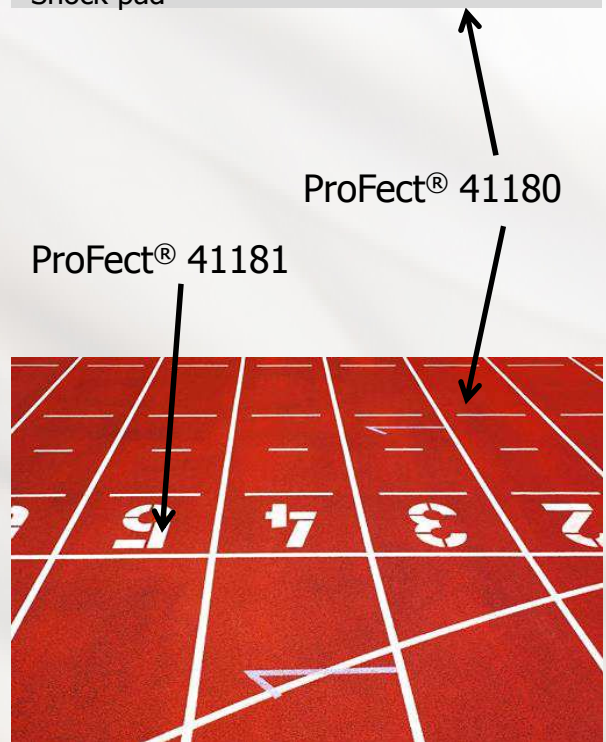

ProFect® 41180

ProFect® 41181

All available in 1000 kg IBC and 200 kg drums.